

PET film single-coated PSA tape for eyeglass lens edging


## Anti-slip sheet / Rikipad Z-6018

### 1. Features


Rikipad Z-6018 is developed as fixing material using for edging eyeglass lens.

Rikipad Z-6018 have good performance for preventing angle twisting of various eyeglass lens after edging.

### 2. Composition

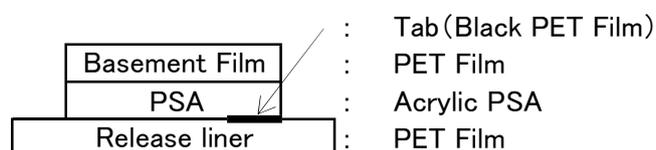

▲ CROSS SECTION

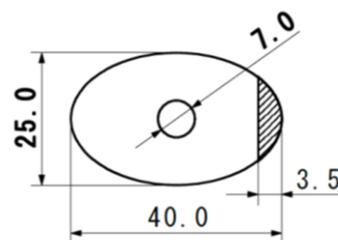

▲ TOP VIEW

### 3. Adhesive Properties

Measurement items			Z-6018
Thickness (μm)			70
180° peel strength (N/25mm)	SUS	after 30min.	16.0
		after 24 hrs.	16.5
Holding power (mm/1440min)		SUS	0.3
Ball tack (χ/32)			5

※The property values described in this document are actual measurements measured by us, not guaranteed values. Please consider and confirm whether the product is suitable for the intended use before use.

**【Measurement condition】** \*Compliant with JIS Z 0237

**Peel strength** : Attach 25mm wide sample to the adherend (2kg rubber roller is pressure-bonded once at a speed of 300mm/min.). Leave it for 30minutes under 23° C x 50% RH conditions, and peel off by 180° at a speed of 300 mm/min. and measure the value.

**Holding power** : Attach a 25mm x 25mm sample to the adherend (2kg rubber roller/ 300mm/min. speed once for each direction), After leaving for 30min. Under the condition of 40°C, and then apply a load of 1kg for 24hrs, and measure the shifted length.

**Ball Tack** : J. Dow Method

### 4. Caution

#### 【Handling precautions】

- Store in a cool and dark place away from high temperature and direct sunlight.

#### 【Safety and hygiene precautions】

- Do not stick directly on the skin.
- Before using, please wipe any oil, moisture and dust etc. on the adherent surface.
- If the usage environment is low temperature, it may be difficult to attach. Please store and use at room temperature in winter.
- Please read the Safety Data Sheet (SDS) before use. Please ask the sales department for SDS.